



**VERTEX**  
ENGINEERING & SERVICES



# UK MANUFACTURED GENERATORS

PS100P –PS150P

PERKINS 1006 SERIES TECHNICAL DATA SHEET

#### Head Office

H # 2243, Markaz, I-10/2  
Islamabad. 44000  
Pakistan  
Tel: +92-51-4433933  
Fax: +92-51-4102199

#### Lahore Office

Mian Ishaq Nursery Area  
Opp Rangers HQ  
Lahore Cantt.  
Tel: +92-423-6635634-5  
Fax: +92-423-6635636

#### Dubai Office

Mirdif Shoroq Bldg 16,  
App # 101,  
Dubai 5600  
Tel: +971 503566782  
Fax: +971 45576210

#### Germany Office

Maehderstr.11  
72768 Reutlingen,  
Germany.  
Tel: +49 7121 624697  
Fax: +49 7121 624698

E: [info@vertexengineering.com.pk](mailto:info@vertexengineering.com.pk)

Web: [www.vertexengineering.com.pk](http://www.vertexengineering.com.pk)





# UK MANUFACTURED GENERATORS

## PS100-PS150P PERKINS 1006 SERIES TECHNICAL DATA SHEET

### Cost Effective Power:

- Compact size and low noise level
- Lower fuel consumption and oil use
- Unique Fastram combustion
- Oil spray cooled pistons



Vertex Generating Set Model	Perkins Engine Model	380-415 50hz		480v 60hz	
		KVA	KW	KVA	KW
PS100P (PRIME)	1006TG2A	100	80	125	64
PS100P (STANDBY)	1006TG2A	110	88	137	69.6
PS140P (PRIME)	1006TAG	140	112	159	76
PS140P (STANDBY)	1006TAG	150	120	175	84
PS150P (PRIME)	1006TAG2	150	120	N/A	N/A
PS150P (STANDBY)	1006TAG2	165	132	N/A	N/A

### RATING DEFINITIONS

#### Prime Power


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and these models can supply 10% overload power for 1 hour in 12 hours.

#### Standby Power

These rating are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.

### DIMENSIONS AND WEIGHTS

Genset Models:	Net kg	Length mm	Width mm	Height mm
PS100P	1265KG	2120	731	1500
PS140P	1312KG	2300	771	1585
PS150P	1354KG	2300	771	1585

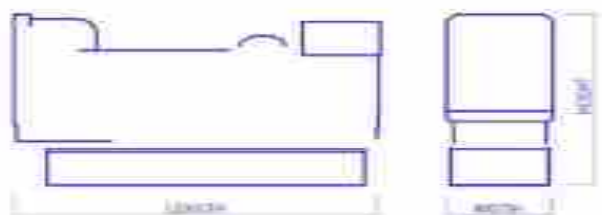



**PERKINS ENGINE TECHNICAL DATA**

Generating Set Model:	PS100P	PS140P	PS150P
Engine Manufacturer:	PERKINS	PERKINS	PERKINS
Model:	1006-TG2A	1006TAG	1006TAG2
Number of Cylinder:	6 In line	6 In line	6 In line
Displacement:	5.9ltrs	5.9ltrs	5.9ltrs
Cycle	4 stroke	4 stroke	4 stroke
Cooling System	Water cooled	Water cooled	Water cooled
Combustion System	Direct Inj.	Direct Inj.	Direct Ing.
Bore/Stroke: (mm)	100 x 127	100 x 127	100 x 127
Aspiration:	Turbo charged	Turbo charged A2A	Turbo charged A2A
Direction of rotation	Anti-clockwise	Anti-clockwise	Anti-clockwise
Lub. Oil Capacity ltrs:	16.1	19	19
Coolant capacity ltrs:	27.7	37.22	41
Electrical equipment	12vDC	12vDC	12vDC
Compression Ratio:	16:1	17:1	17:1
		<b>50 hz</b>	
Engine Speed:	<b>1500rpm</b>	<b>1500rpm</b>	<b>1500rpm</b>
Maximum Continuous Power at Flywheel: kw	91	121	129.3
Maximum Standby Power at Flywheel: kw	100	133.5	143
Fuel Cons: L/hr			
110%	27.1	34.6	45
100%	24.3	31.5	41
75%	17.9	24.1	31
50%	12.3	16.5	20
		<b>60hz</b>	
Engine Speed:	<b>1800rpm</b>	<b>1800rpm</b>	<b>1800rpm</b>
Maximum Continuous Power at Flywheel: kw	107	134	N/A
Maximum Standby Power at Flywheel: kw	118	147	N/A
Fuel Cons: L/hr			
110%	31.7	41.3	N/A
100%	28.9	37.6	N/A
75%	21.7	28.9	N/A
50%	15.4	19.4	NN

**NOTE:** All engine performance data based on our maximum continuous rating at the standard reference conditions specified. Fuel consumption data at full load with a diesel fuel with a specific gravity of 0.85 conforming to BS2869:1988, Class A2

In line with our policy of continuous product development, we reserve the right to change specifications without notice.

**ALTERNATOR MODELS**

Mecc Alte (UK)	ECP34-2S	ECP34-2L	ECP34-2L
Newage Stamford	UCI274C	UCI274E	UCI274F
Leroy somer	LSA44.2VS45	LSA44.2M95	LSA44.2L12



**STANDARD OPTION:**

12/24volt axial starter motor  
12/24v Heavy duty batteries  
Engine driven charging alternator  
Engine starting motor  
Set mounted heavy duty tropical radiator and pusher fan  
Fuel oil filter  
Lube oil filter  
Air intake filter  
Energized to run solenoid  
Low oil pressure switch  
High engine temperature switch  
Industrial silencer with flexible section  
Mechanical/electrical governor or ECM(check with sales)  
8hr base fuel tank upto 800kva  
Open Skid base above 800kva  
Captive AVMs  
One set operation manuals  
One set engine and alternator maintenance books  
One set electrical schematic drawings  
TESTING All units are fully tested in our works prior to dispatch and each unit is issued with a Test Certificate.  
WARRANTY All Power Co equipment carries a full 12 month warranty in accordance with our conditions of sale. 24monthys warranties are available FOC for standby units running at limited hours (please check with sales for full details).

**AVAILABLE OPTIONS:**

55DBA-85DBA weatherproof acoustic canopies and containers  
Residential silencers  
Critical silencers  
Full EEC trailers  
Non EEC trailers  
Free Standing fuel tanks  
Bunded fuel tanks  
Automatic fuel make-up system  
Fuel level warnings  
Unlimited other options are available

**ALTERNATOR:**

We use Cummins Generator technology (Newage Stamford), Leroy Somer of France and also MeccAlte of the UK(upto 350kva) and MeccAlte of Italy (360-3000kva)  
Brushless revolving field  
4 pole  
Class H Temperature rise 125/40  
Class H Insulation  
Automatic voltage regulator  
Single bearing  
0.5% Voltage regulation (Leroy)  
1.0% Voltage regulation 200kva and above (MeccAlte)  
1.5% Voltage regulation 0-180kva and above (MeccAlte)  
0.5% Frequency regulation  
TIF 50/NEMA MGI-22-43  
THF >3%  
RFI to BS800  
50HZ Voltage range- 380/220 – 415/240v  
60HZ Voltage range- 220/127 – 480/277v

**SET MOUNTED DIGITAL CONTROL SYSTEM:**

Power Co model 6110 microprocessor engine control module provides metering and alarm facilities via the LCD display as follows:  
Emergency stop pushbutton  
Generator volts line/line  
Generator volts line/neutral  
Generator amps 3 phase  
Generator frequency Hz  
Engine speed  
Engine oil pressure  
Engine coolant temperature  
Engine battery/volts  
Engine hours run

**PROTECTIONS:**

Generator over-volts – shutdown  
Generator under-volts – shutdown  
Over speed – shutdown  
Under speed – shutdown  
Over frequency Hz – shutdown  
Under frequency Hz – shutdown  
High current – alarm  
Battery charge fail – alarm  
Emergency stop  
Low oil pressure – shutdown  
High engine temperature – shutdown  
Fail to start – alarm  
High battery volts – alarm  
Low battery volts – alarm  
Fail to come to rest – alarm  
Loss of speed sensing signal – alarm  
LED indication indicates – alarm  
(amber) or shutdown (red flashing)  
USB PROGRAMME PORT – standard printer cable connection

**TIMERS:**

Start delay  
Stop delay  
Crank/crank rest timer  
Crank/crank rest timer  
Engagement attempt and manual crank limit  
Safety on delay timer  
Warm up timer  
Cooling timer  
Energize to stop timer

**CONTROL SYSTEM UPGRADES:**

7210 auto-start unit gives the following extra's:-  
Generator KVA  
Generator KW  
Generator COS

5510 auto-synchronising unit gives you the following upgrades:-  
Generator kVA L1, L2, L3, Total  
Generator kW L1, L2, L3, Total  
Generator Pf L1, L2, L3, Average  
Generator kVAr L1, L2, L3, Total  
Generator kWh  
Generator kVAh  
Generator kVArh  
Generator Phase Sequence  
Full automatic synchronising  
Automatic load sharing  
Automatic load level demand (switches units on and off line depending on load levels)



Automatic transfer panel (ATS) 25 – 1000A Contactors

IP55 wall or freestanding sheet steel cubicle with hinged front access door and base entry gland plate. Finished in grey epoxy polyester powder-coat. AC1 Rating at 40oC

Fitted with;

- 1 x Pair of 4 pole mechanically and electrically interlocked contactors.
- x Set of load links and terminals upto 125A.
- 1 x Set of copper bar load links above 125A. 800 -
- 1 x 3 ph + N mains detector.
- 1 x Mains available indicator.
- 1 x Mains on load indicator.
- 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth stud.
- 1 x Set of interconnecting terminals.
- 1 x Hazard warning label
- 1 x Rating label.

Dimensions 4 pole ;

25A – 125A	H600mm x W400mm x D200mm
200A – 450A	H800mm x W600mm x D300mm
550A –1000A	H1200mm x W800mm x D400mm

Automatic transfer panel (ATS) 800 – 6300A Circuit Breaker

Floor-standing cubicle with hinged front access door and removable side and rear covers for ease of installation. Top and base entry aluminium gland plate. Control compartment IP2X and segregated from load switching. Secondary screening over switchgear. Finished in grey polyester powder-coat RAL7035.

Fitted with;

- 1 x Pair of motorised mechanically and electrically interlocked fixed pattern circuit breakers (Non Auto).
- 1600A MCCB (MCS)
- 800 – 6300A ACB
- 1 x Set of load connection terminals.
- Generator / Mains / Load.
- 1 x Mains available indicator.
- 1 x Mains on load indicator.
- 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth bar.
- 1 x Set of interconnecting terminals.

1 x Hazard warning labels

1 x Rating label.

MCCB;

800 - 1600A	H1800mm x W600mm x D800mm
-------------	---------------------------

ACB;

800A – 1600A	H1800mm x W 600mm x D800mm
2000A	H2000mm x W 800mm x D800mm
2500A – 3200A	H2000mm x W1000mm x D800mm
4000A	H2000mm x W2000mm x D800mm
5000A – 6300A	H2000mm x W2400mm x D800mm

Dimensions;